


ELLER Topschalm 3 of 4-sprong



SPECIFICATIES:

- Conform EN1677 met een hogere werklust.
- Geschikt voor 3- en 4-sprong.
- Gebruikstemperatuur -29°C - 205°C.
- Kettingmaat en grade ingeslagen in topschalm.

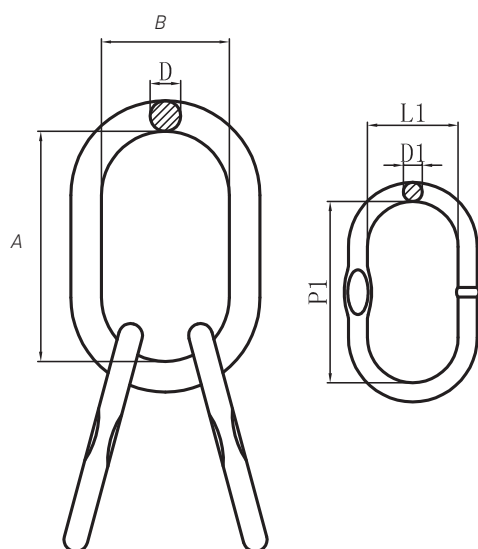

Artikelcode	TBV KETING Ø (MM)	WERKLAST HOEK 0°-45° [T]	A (MM)	B (MM)	D (MM)	P1 (MM)	L1 (MM)	D1 (MM)	EIGEN GEWICHT (KG)
ELCN-MLY-06	6	3	135	75	20	54	25	13	1.4
ELCN-MLY-08	8	5.3	160	90	23	70	35	16	2.4
ELCN-MLY-10	10	8.4	180	100	29	85	40	20	4.3
ELCN-MLY-13	13	14.1	200	110	35	115	50	23	7.1