


Maatvoeringstekening

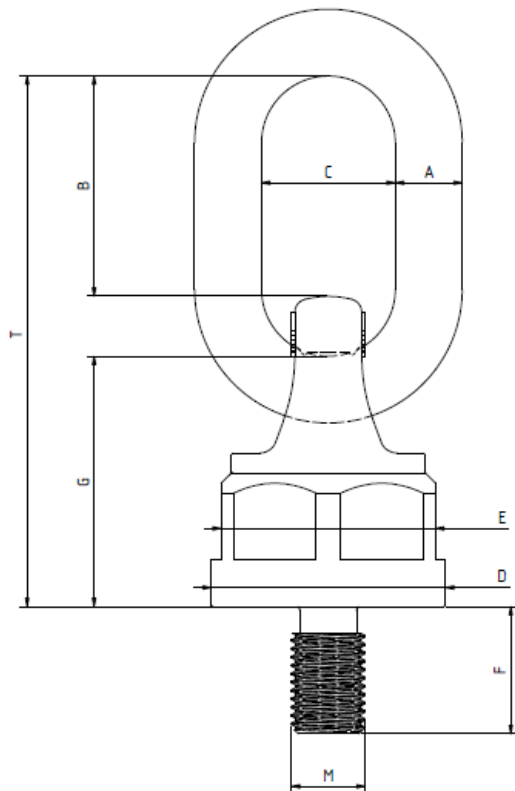

Maten in mm

Artikelcode.	A	B	C	D	E	F	G	M	T	Eigen gewicht
BLP-VW-M08	13,0	42,0	30,0	40,0	37,0	12,0	44,0	8,0	96,0	0,4 kg
BLP-VW-M10	13,0	42,0	30,0	40,0	37,0	19,0	44,0	10,0	96,0	0,5 kg
BLP-VW-M12	13,0	42,0	30,0	40,0	37,0	19,0	44,0	12,0	96,0	0,5 kg
BLP-VW-M16	13,0	42,0	30,0	40,0	37,0	31,8	44,0	16,0	96,0	0,5 kg
BLP-VW-M20	20,0	67,0	40,0	70,0	65,0	38,1	75,0	20,0	160,0	2,3 kg
BLP-VW-M24	20,0	67,0	40,0	70,0	65,0	38,1	75,0	24,0	160,0	2,4 kg
BLP-VW-M30	22,0	95,0	51,0	79,0	74,0	50,0	90,0	30,0	205,0	3,8 kg
BLP-VW-M36	22,0	95,0	51,0	79,0	74,0	54,0	90,0	36,0	205,0	3,9 kg
BLP-VW-M42	26,0	108,0	63,0	93,0	85,0	63,0	100,0	42,0	230,0	6,0 kg
BLP-VW-M64	32,0	120,0	70,0	105,0	95,0	95,0	132,0	65,0	278,0	10,8 kg

Inschroefdiepte en aanhaalmoment



LET OP: Deze aanhaalmomenten zijn richtwaarden voor metrische grove schroefdraad

Artikelcode.	Schroef- draad	Draadlengte	Moment
BLP-VW-M08	M08	12,0 mm	37,8 Nm
BLP-VW-M10	M10	19,0 mm	72,0 Nm
BLP-VW-M12	M12	19,0 mm	122,4 Nm
BLP-VW-M16	M16	31,8 mm	263,1 Nm
BLP-VW-M20	M20	38,1 mm	514,4 Nm
BLP-VW-M24	M24	38,1 mm	886,7 Nm
BLP-VW-M30	M30	50,0 mm	1655,2 Nm
BLP-VW-M36	M36	54,0 mm	2764,7 Nm
BLP-VW-M42	M42	63,0 mm	4256,3 Nm
BLP-VW-M64	M64	95,0 mm	13662,3 Nm

Werklasttabel

Aantal punten	1	2	1	2	2		2	3-4		3-4
Hoek	0°	0°	90°	90°	0-45°	45-60°	A.Sym	0-45°	45-60°	A.Sym
BLP-VW-M08	0,6	1,2	0,4	0,8	0,6	0,4	0,4	0,8	0,6	0,4
BLP-VW-M10	0,9	1,8	0,6	1,2	0,8	0,6	0,6	1,3	0,9	0,6
BLP-VW-M12	1,2	2,4	0,7	1,4	1,0	0,7	0,7	1,5	1,1	0,7
BLP-VW-M16	2,6	5,2	1,5	3,0	2,1	1,5	1,5	3,2	2,3	1,5
BLP-VW-M20	4,0	8,0	2,5	5,0	3,5	2,5	2,5	5,3	3,8	2,5
BLP-VW-M24	7,0	14,0	4,0	8,0	5,7	4,0	4,0	8,5	6,0	4,0
BLP-VW-M30	10,0	20,0	7,5	15,0	10,6	7,5	7,5	15,9	11,3	7,5
BLP-VW-M36	15,0	30,0	10,0	20,0	14,1	10,0	10,0	21,2	15,0	10,0
BLP-VW-M42	17,0	34,0	13,0	26,0	18,4	13,0	13,0	27,6	19,5	13,0
BLP-VW-M64	28,0	56,0	25,0	50,0	35,4	25,0	25,0	53,0	37,5	25,0