


ELLER BOW SHACKLE SCREW PIN

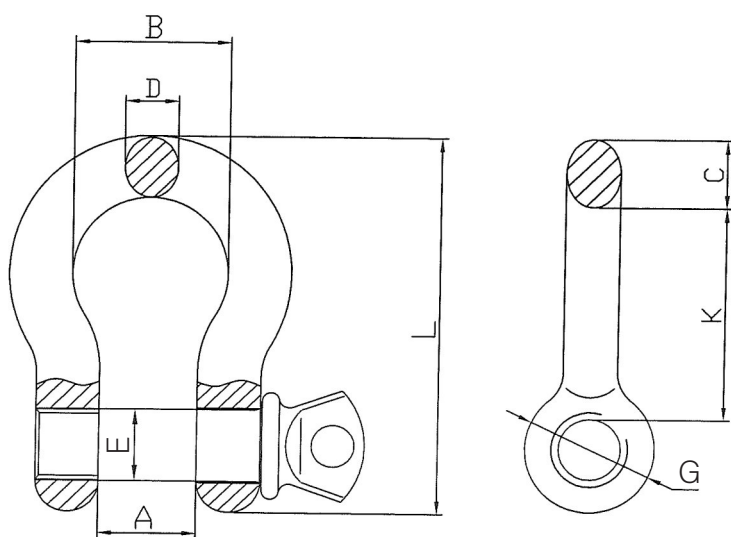

SPECIFICATIES:

- US type: Conform US Fed-Spec RR-C-271
- Suitable for lifting applications
- Hot-dip galvanised
- On each shackle is indicated:
 - WLL
 - Manufacturer's batch code (on the shackle and on the pin)
 - CE mark
 - Stamp of the producer
- Safety factor δ ;
- Temperature range: -20°C up to +200°C

ARTIKELCODE	WLL (T)	A (MM)	B (MM)	C (MM)	D (MM)	E (MM)	G (MM)	L (MM)	K (MM)	OWN WEIGHT
ELRHBBG001000	1	16,8	26	9,7	9,7	11,2	23	63,2	35,5	0,14
ELRHBBG001500	1,5	19	29,5	11,2	11,2	13,4	27	74	42	0,17
ELRHBBG002000	2	20,6	33,3	13,6	13,6	15,2	30	84,2	47	0,32
ELRHBBG003250	3,25	27	43	17,6	16	19	38	106,5	59	0,63
ELRHBBG004750	4,75	32	50,8	20,6	19,5	21,2	46	126,5	71	1,09
ELRHBBG006500	6,5	36,6	58	24,6	22,4	25	53	148	83	1,66
DIVHBBG008500	8,5	43,5	68,5	26,5	26,5	28	60		96,3	2,25
DIVHBBG009500	9,5	48	75	29	29	32	68		109	3,25
DIVHBBG012000	12	53	84	32	32	35	76		120,5	4,45
DIVHBBG013500	13,5	59	94	35	35	38	84		134	5,95
DIVHBBG017000	17	62	99	38	38	42	92		148,5	7,72
DIVHBBG025000	25	75	128	45	45	50	106		178	12,64