






Green Pin® Snatch Block S

Snatch block type 601S with Green Pin® Shackle attached

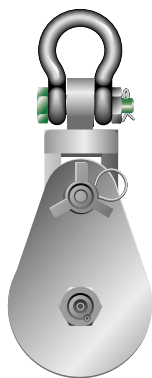

P-6951

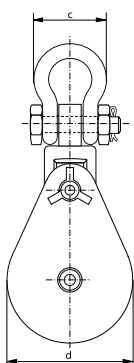

- **Material:** carbon steel, fitted with conical roller bearings
- **Safety factor:** MBL equals 4 x WLL
- **Finish:** painted
- **Certification:** 2.1 2.2 MTC[®] CE
- **Note:** Working Load Limit is on the headlifting

working load limit	diameter wire rope	diameter outside sheave	length	width	width outside	weight each
t	mm	a mm	b mm	c mm	d mm	kg
2	7 - 9	75	293	75	82	3.9
4	10 - 12	115	363	102	120	6.4
4	12 - 14	152	417	102	160	8.4
8	14 - 16	152	477	118	160	14.3
12	14 - 16	152	555	147	160	20
8	20 - 22	152	477	118	160	14.1
12	20 - 22	152	555	147	160	20
15	24 - 26	152	585	162	160	24
4	10 - 12	203	478	102	210	11
12	14 - 16	203	580	147	210	27
8	20 - 22	203	526	118	210	18
12	20 - 22	203	580	147	210	28
15	24 - 26	203	646	162	210	30
8	14 - 16	254	582	118	260	26
8	20 - 22	254	582	118	260	26
12	20 - 22	254	680	147	260	35
15	24 - 26	254	705	162	260	42
8	20 - 22	305	612	118	310	31
12	20 - 22	305	745	147	310	53
15	24 - 26	305	771	162	310	55
8	20 - 22	357	662	118	360	31
12	20 - 22	357	770	147	360	60
15	24 - 26	357	798	162	360	63
22	28 - 32	357	906	216	385	126
8	20 - 22	406	712	118	410	35
12	20 - 22	406	820	147	410	67
15	24 - 26	406	848	162	410	70
22	28 - 32	406	963	216	415	139
8	20 - 22	457	762	118	460	42
12	20 - 22	457	878	147	460	75
15	24 - 26	457	898	162	460	78
22	28 - 32	457	1033	216	465	154
30	28 - 32	457	1083	238	468	218

continued on next page >