



Load Links

Accurate and reliable tensile load monitoring for lifting applications.



Options



Wireless & Internal Antenna



Matched Telemetry Displays



Rent this item



Cabled with 49.2ft flying cable



Data Logging Software Available



ATEX version

Suitable for all industry sectors including marine, offshore and subsea.

Due to the robust, lightweight high tensile aluminium design these load links are ideal for mobile applications and available as either cabled or wireless with a range of options.

Displays & Portable Case

Rugged case design with foam compartments to firmly hold the load link, telemetry display, spare set of batteries. Can also accommodate connecting cable for wired units and matched set of shackles.

- Lockable case
- Plastic case available for 6.5Te - 85Te
- Custom transport case 100Te - 500Te

Load Cell Data Logging


LMS-LOG100 Advanced data logging software provides real time monitoring of up to 100 load cell devices simultaneously.

Remotely access your data quickly and easily from a computer, tablet & smart phone via web browser. Export data in standard JSON or CSV formats with customizable reporting to suit your needs.



Features

- Load link designs from 6.5Te to 500Te as standard other capabilities on request
- Designed to be rigged & operated with a Working Load Link (WLL) of the same capacity
- Safety factor of 5:1
- Accuracy <0.5% of applied load
- ATEX versions available for zones 0, 1, & 2
- Subsea variants available on request
- Every unit load tested and certified

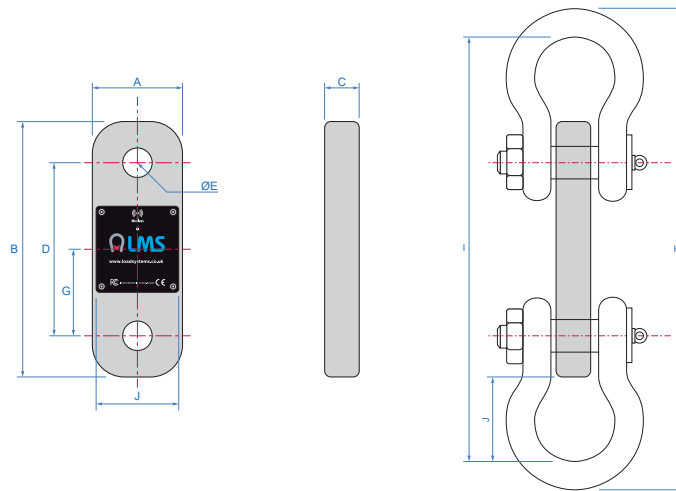

Load Link Dimensions mm														
Capacity Tonne	6.5	13.5	17	25	35	55	85	100	150	200	250	300	400	500
A	84	143	93	127	157	183	198	220	272	331	395	432	490	540
B	238	292	302	332	436	470	518	590	695	769	879	977	1037	1137
C	32	45	50	60	70	85	104	124	136	150	177	182	198	198
D	162	182	182	206	256	286	310	350	395	419	469	517	547	607
ØE	27	40	43	55	61	75	86	100	118	135	145	158	180	190
F	50	63	68	78	88	93	122	142	168	173	195	200	200	243
G	81	91	91	103	128	143	155	175	197.5	209.5	234.5	258.5	273.5	303.5
Weight (kg)	1.5 kg	6 kg	6.5 kg	7 kg	12 kg	15 kg	23 kg	37 kg	63 kg	93 kg	135 kg	186 kg	228 kg	322 kg
Load Link & Shackle Dimensions mm														
ØE	397	556	592	702	807	1006	1201	1435	1533	1815	1977	2183	2398	2588
F	353	486	516	612	707	876	1051	1245	1323	1575	1717	1903	2058	2228
G	57.5	97	107	140	135.5	203	266.5	327.5	314	403	419	463	510.5	545.5
Weight (kg)	5.04	19.08	22.88	35.44	51.06	94.18	147	257	383	563	705	866	1348	1673.5
Shackle Size / Type	6.5	13.5	17	25	35	55	85	100	150	200	250	300	400	500
Van Beest	P-4136							P6036						
GN Rope	H9							H10						
Crosby	G2130 to G2140													

Specifications		
Overload Tested (Proof Load)		200% rated load (6.5te - 250te sizes) 150% rated load 300te and above
Minimum Breaking Load (MBL)	5Te to 400Te	500% rated load
	500Te	450% rated load
Dead Load Offset		+/- 0.1mV
Accuracy		< 0.5% of applied load
Repeatability		< +/- 0.1% of applied load
Hysteresis up to FS		Minimal
Operating temperature		-20°C to +70°C
Environmental Rating		IP67
Range		800 Meters (straight line uninterrupted view)
Transmit rate		900ms (standard)
Antenna (Wireless Version)		Internal
Radio (Wireless Version)		2.4 Ghz; worldwide licence free
Cabled Version Output Signals		Analogue signals 4-20mA in 2 or 3 wire output with 10-30VDC supply 0-5VDC or 0-10VDC 3-wire output with 10-30VDC supply Digital signals RS232 with a protocol of your choice with 5-20VDC supply RS485 with a protocol of your choice with 5-20VDC supply
Cable Version Connection Type		Load link with plug-in socket and 15m, 4-core screened PUR cable with matched plug-in connector fitted. Other types on request.
Battery Type / Lifespan	Load Cells	6.5Te - 35Te Load Link - 2 x AAA 1.5V @ 500+ hours (continuous) 55Te - 85Te Load Link - 2 AA 1.5V @ 1200+ hours (continuous) 100Te - 500Te Load Link - 2 x C 1.5V @ 2000+ hours (continuous) Battery changes are reduced when device is put on sleep mode during 12 month calibration windows.
	Display	2 x AA 1.5V batteries @ 40 hours (continuous)
Calibration		12 months (calibration service available)
Warranty		12 months
Material Finish		Lightweight, high tensile grade aluminium, hard anodised for marine environments.
Traceability and Safety Compliance		BS EN ISO 7500-1:2004, Machinery directive 2006/42/EC (SI 2008/1597)
ATEX Options		
Zone 2		Standard options (wireless and cabled)
Zone 1		Standard options (wireless and cabled)
Zone 0		Stainless steel construction, cabled options - contact for more details