

Standards:
 The WH L4 compact lever hoist is verified by DNV as compliant with the requirements of the relevant international standards.
 (Verification no. N141UH09)
 British Standard BS EN13157:2004 + A1:2009
 American Standard ASME B30.16-2014
 Australian Standard AS1418.2-1997
 South African Standard SANS 1594:2007
 NORSOK R-002: 2017.

Light load capability: tested and certified at 2% of the chain hoist rated capacity.

Twin pawl: fitted as standard.

Safety factor: 4:1.

Safety latches: hooks are fitted with heavy duty cast steel latches. The latch and hook tips are integrated creating a strong and robust hook closure.



Hook overload and traceability marks: hooks have overload indicator marks either side of the hook throat. Both top and bottom hooks are embossed with a batch code, manufacturer's mark and the working load limit.

Load chain: fitted with load chain that fully complies with international standard BS EN818-7 Grade T (8).

Temperature range:
 -20°C to +120°C.

Proof Tested: 100% of hoists are proof tested to 1.5 times the WLL.



Manufactured and proof tested in the UK.

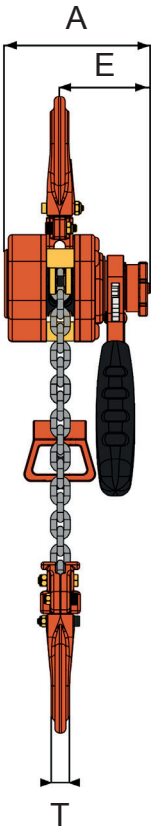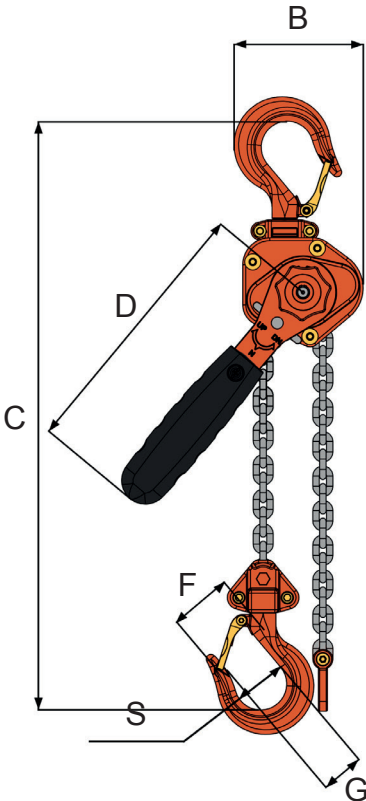

Specifications

Part Code	WLL tonnes	No. of Falls	Load Chain mm	Standard Lift m	A mm	B mm	C mm	D mm	E mm	F mm	G mm	S mm	T mm	Mass kg
032.025	0.25	1	3.2 x 9	1.5	90	68	200	150	56	35.5	20	32.0	11.0	1.6
032.050	0.25	1	4.3 x 12	1.5	98	81	250	172	62	42.0	21	34.5	12.5	2.6

- Standards:**
British Standard BS EN13157:2004 + A1:2009
American Standard ASME B30.16-2014
Australian Standard AS1418.2-1997
South African Standard SANS 1594:2007
NORSOK R-002: 2017.
- Light load capability:** tested and certified at 2% of the chain hoist rated capacity.
- Twin pawl:** fitted as standard.
- Safety factor:** 4:1.
- Safety latches:** hooks are fitted with heavy duty cast steel latches. The latch and hook tips are integrated creating a strong and robust hook closure.
- Hook overload and traceability marks:** hooks have overload indicator marks either side of the hook throat. Both top and bottom hooks are embossed with a batch code, manufacturer's mark and the working load limit.
- Load chain:** fitted with load chain that fully complies with international standard BS EN818-7 Grade T (8).
- Temperature range:**
-20°C to +120°C.
- Proof Tested:** 100% of hoists are proof tested to 1.5 times the WLL.
- Manufactured** and proof tested in the UK.

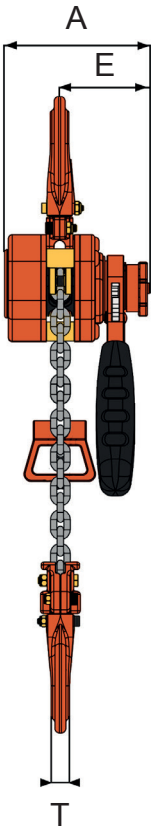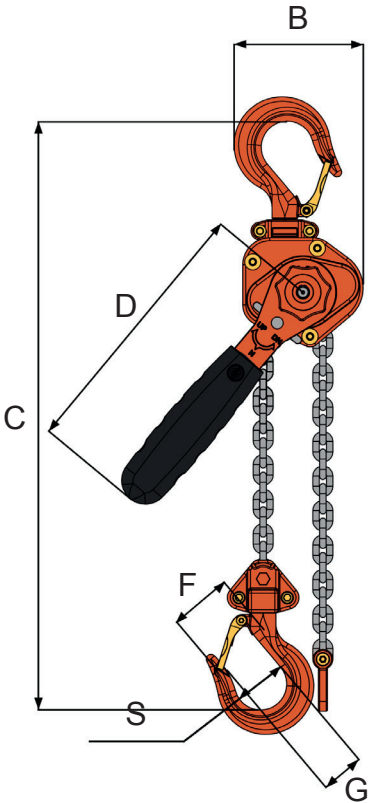

Specifications

Part Code	WLL tons	No. of Falls	Load Chain mm	Standard Lift m	A inch	B inch	C inch	D inch	E inch	F inch	G inch	S inch	T inch	Mass lbs
032.025	0.25	1	3.2 x 9	1.5	3.54	2.68	7.87	5.91	2.20	1.40	0.79	1.26	0.43	3.5
032.050	0.25	1	4.3 x 12	1.5	3.86	3.19	9.84	6.77	2.44	1.65	0.83	1.36	0.49	5.7