


Multi-Directional Clamp

Manufactured in accordance with

- BSEN13155:2003+A2:2009 - Cranes - Safety - Non fixed load attachments
- ASME B30.20-2018 - Below-the-Hook Lifting Devices

The William Hackett multi-directional clamp is suitable for lifting, transporting, suspending, lateral pulling and turning over steel plates and materials in various shapes throughout civil engineering, construction, iron and steel, shipbuilding, and steel plate working industries. They are also ideal for hanging hoists and for the pulling of various materials as an anchor point.

Specifications

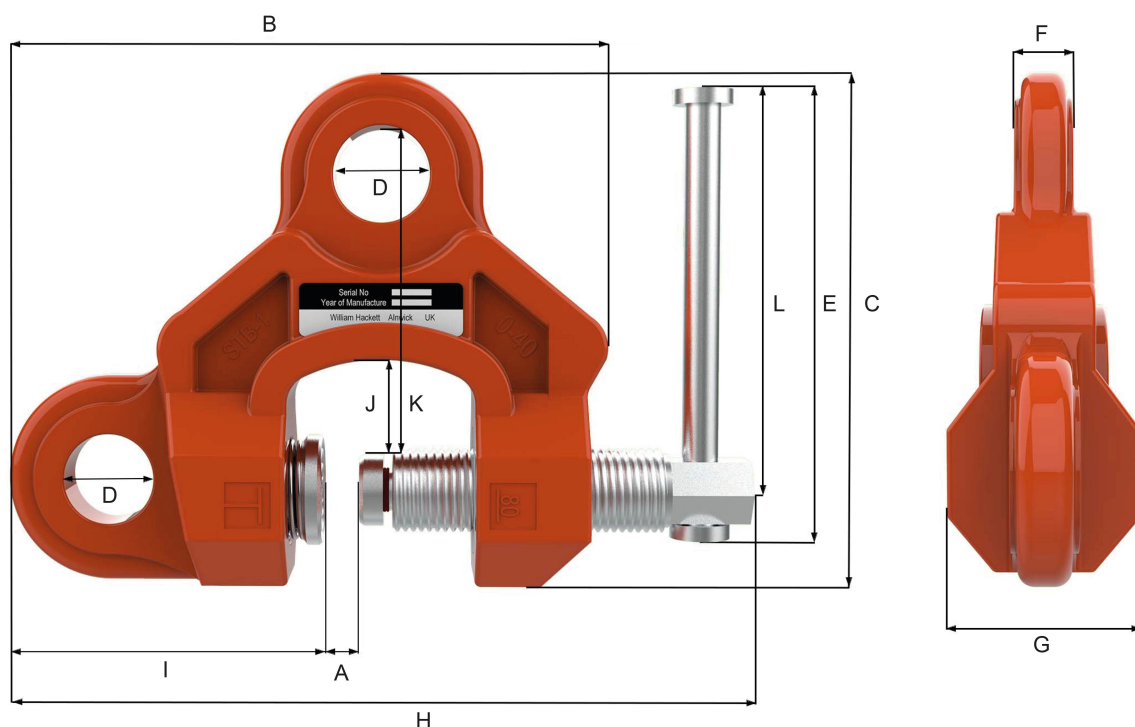

Part Code	WLL t	Effective Thickness mm	Gauge Length mm	A mm	B mm	C mm	D mm	E mm	F mm	G mm	H mm	I mm	J mm	K mm	L mm	Mass kg
029.100	1.0	0-40	80	0-40	203	170	32	150	20	61	235-280	90	35	73	132	4.3
029.200	2.0	0-40	90	0-40	226	190	36	150	27	76	260-305	100	28	88	132	8.2
029.320	3.2	5-40	95	5-40	250	205	45	150	33	86	290-325	120	30	93	132	10.0